

Hydro Balance



15 OZ.

HYDRO-BALANCE



COLD PIPE INSULATING SPRAY

- Stops Sweating of Cold Pipes
- Use On: Copper, Black Iron, Stainless Steel, Galvanized, Brass and PVC Pipe
- Eliminates Drip Damage

DANGER: EXTREMELY FLAMMABLE. VAPOR HARMFUL. CONTENTS UNDER PRESSURE.

COLD PIPE INSULATING SPRAY


SHAKE WELL BEFORE USE.

DURABLE • FLEXIBLE • WATER RESISTANT

ADHERES TO STAINLESS STEEL, BLACK IRON, COPPER, BRASS, GALVANIZED AND PVC

MAY BE PAINTED WHEN DRY

Prevents condensation on cold water pipes, refrigeration lines and coils, condensers, valves and fittings. Insulates and prevents moisture build-up on water tanks, metal gutters, ice machines, air conditioning ducts and toilet tanks. Provides a "Quilting" effect by trapping moving air in special air pockets created by the stipple texture. Convenient aerosol spray is easy to apply in hard to reach areas and conforms to irregularly shaped surfaces. Dries quickly to a clean, white insulation which is nonflammable when dry. Excellent for repairing or for use in conjunction with wrap around, sleeve or foam tube insulation.

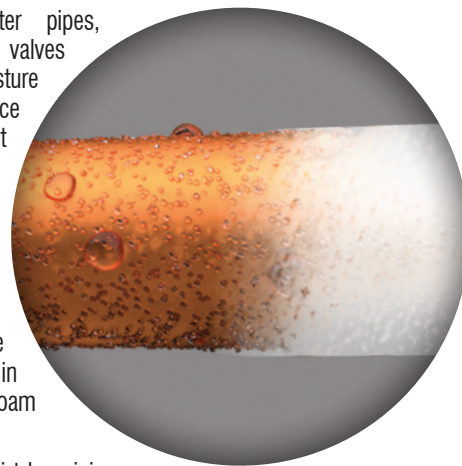

PREPARATION: Remove loose dust and dirt by wiping surface gently with a dry rag or duster. Cover surfaces under area to be treated with newspaper or a drop cloth. Protect other areas with masking tape.

DIRECTIONS: Shake for 1 minute with agitator ball moving and shake periodically during application. Always be sure surface is clean and dry before application. For best results apply a thin first coat by spraying from a distance of 30 cms (12"). Recoat from a distance of 15 cms (6") for a thicker second layer.

IMMEDIATELY AFTER USE, INVERT CAN AND SPRAY TO CLEAR APPLICATOR NOZZLE

H-CP15

DANGER: Extremely flammable aerosol. Causes skin irritation. Causes serious eye irritation. May cause drowsiness or dizziness. Suspected of causing genetic defects. May cause cancer. Suspected of damaging the unborn child. May cause damage to organs through prolonged or repeated exposure. Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Do not spray on an open flame or other ignition source. Pressurized container. Do not pierce or burn, even after use. Do not breathe mist or vapor. Wash thoroughly after handling. Use only outdoors or in a well-ventilated area. Wear protective gloves/protective clothing/eye protection/face protection. Store in a well-ventilated place. Store locked up. Protect from sunlight. Do not expose to temperatures exceeding 49°C/120°F. Dispose of contents/container in accordance with local/regional/national/international regulations.

FIRST AID: IF ON SKIN: Wash with plenty of water. If skin irritation occurs: Get medical advice/attention. Take off contaminated clothing and wash before reuse. **IF INHALED:** Remove person to fresh air and keep comfortable for breathing. Call a poison center/doctor if you feel unwell. **IF IN EYES:** Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention. **IF EXPOSED OR CONCERNED:** Get medical advice/attention. **IF SWALLOWED:** In the unlikely event of swallowing, contact a physician or poison control center. Rinse mouth.

CONTAINS (CAS No.): Trichloroethylene (79-01-6), Butane (106-97-8), Propane (74-98-6), Magnesium Silicate (14807-96-6), Palmitic Acid (57-10-3), Titanium dioxide (13463-67-7) and Toluene (108-88-3).

Caution: Use with adequate ventilation. Intentional misuse by concentrating and inhaling the product can be harmful or fatal. **KEEP OUT OF REACH OF CHILDREN.**

WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm.

24 HOUR MEDICAL EMERGENCY: 1-866-836-8855



Made in U.S.A.
HYDRO-BALANCE CORP.
519 Huffines Blvd., Lewisville, TX U.S.A.
(800) 527-5166 (972) 394-9422
www.HydroBalance.com

FAST ACTING

VALVES AND FITTINGS